



VIKAS INDUSTRIES

A GOVT. OF INDIA RECOGNISED STAR EXPORT HOUSE



AN ISO 9001: 2015 CERTIFIED COMPANY
A UL LISTED COMPANY

RUBBER NUT CLAMP/SPLIT CLAMP

CONSTRUCTION : IT IS MADE UP OF TWO SIMILAR METAL FORMED STRIPS COMBINED WITH SCREWS & EPDM LINING.


APPLICATION : IT IS USED FOR MOUNTING PIPES TO THE VERTICAL/HORIZONTAL WALLS, CEILINGS & FLOORS. EPDM RUBBER LINING IS FOR NOISE REDUCTION UPTO 15 Db & VIBRATION REDUCTION.

APPROVALS : UNDERWRITERS LABORATORIES U.L., U.L.C. LISTED, (SIZE: 1/2" TO 8")

COMPLIANCE : ANSI / CAN/UL 203:2020 (REF. ASTM A653M, NFPA13, UL 2043)

MATERIAL : MILD STEEL.

FINISH : ZINC PLATED ELECTRO GALVANIZED AS PER ASTM B 633.

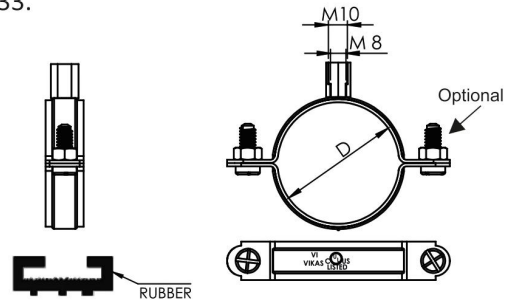

RUBBER TECHNICAL DATA :	
MATERIAL	: EDPM
STRETCH	: ≥ 250%
HARDNESS	: 45 SHORE A,
TEMP. RESISTANCE	: -40° C to +110° C
OZONE RESISTANCE	: GRADE O

RUBBER NUT CLAMP

Article No.	D (MM)	Normal Pipe Size (Inch)	Pipe OD (MM)	Side Screw Size (MM)	Hanger Rod Size (MM)	Max Load (Kg.)
VIRNC-01	20-25	1/2"	22	M6	M8XM10	460
VIRNC-02	26-30	3/4"	28	M6	M8XM10	460
VIRNC-03	32-36	1"	34	M6	M8XM10	460
VIRNC-04	38-43	1-1/4"	42	M6	M8XM10	460
VIRNC-05	47-51	1-1/2"	48	M6	M8XM10	460
VIRNC-06	60-64	2"	60	M6	M8XM10	460
VIRNC-07	74-80	2-1/2"	75	M6	M8XM10	570
VIRNC-08	87-92	3"	89	M6	M8XM10	570
VIRNC-09	99-105	3-1/2"	102	M6	M8XM10	600
VIRNC-10	113-118	4"	115	M6	M8XM10	600
VIRNC-11	138-142	5"	141	M8	M12	950
VIRNC-12	168-172	6"	169	M8	M12	950
VIRNC-13	215-220	8"	219	M8	M12	950
VIRNC-14	108-113	(110MM)	110	M6	M8XM10	600

*Side Nuts are not standard part. Can be supplied on request for extra strength/load bearing.